



# Miniature Micro / Snap Action Switches



## Specifications:

Contact rating:	250 V AC, 15 A
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	1500 V, 50Hz for the duration of 1 minute
Operating temperature:	-25°C to +85°C
Mechanical life:	minimum 100 000 operations
Contacts:	silver-alloy
Terminals:	brass, silver-plated
Case:	PBT (UL 94 V-0)
Mounting:	on panel
Timing:	non-shorting

**Models:** Switching function

S P D T

DM-VMS15-05N-250 on - mom

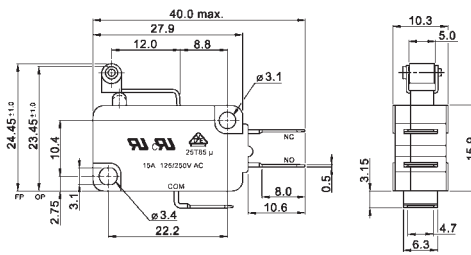

Further types on request