

Miniature Micro / Snap Action Switches



Specifications:



Contact rating:	250 V AC, 10 A
Contact resistance:	< 15 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-25°C to +65°C
Operating force:	< 240 gf
Mechanical life:	minimum 20 000 000 operations
Contacts:	silver-alloy
Terminals:	brass, silver-plated
Case:	PBT (UL 94 V-0)
Mounting:	on panel, hole Ø 3.1 mm
Timing:	non-shorting, positive break (force-driven)

Models: Switching function

SPDT

TMV 104 C

on - mom

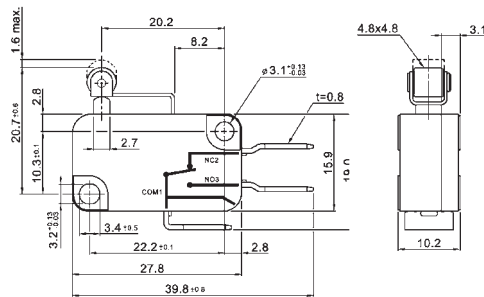

Further types on request