

Subminiature Micro / Snap Action Switches





Specifications:

Contact rating:	250 V AC, 3 A
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	1000V, 50Hz for the duration of 1 minute
Operating temperature:	-25°C to +80°C
Mechanical life:	minimum 1000 000 operations
Contacts:	silver-alloy
Terminals:	brass, silver-plated
Case:	PBT (UL 94 V-0)
Mounting:	on pc-board, on panel
Timing:	non-shorting
Soldering conditions:	auto-soldering – max. 3 sec, max. 250°C manual soldering – max. 3 sec, max. 380°C

Models: Switching function

SPDT

DM-SM3 01 N-30S on – mom

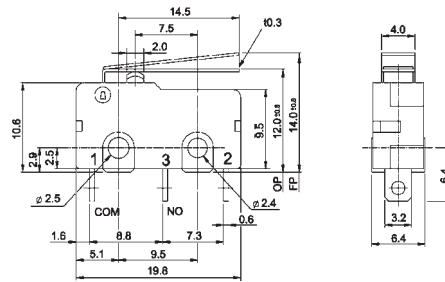

Further types on request

Packing: 1000 pcs/bag