

Anti-Vandal Pushbutton Switches


Specifications:

Insulation resistance: > 1000 MΩ at 500 V DC
 Operating temperature: - 20° to + 55° C
 Switching force: off – mom
 Material: Contact: silver plated alloy
 Nut: nickel plated brass

Models:


MAV 01 B1M1

Rating: 125 V AC, 2 A / 48 V DC, 2 A
 Contact resistance: <10 mΩ
 Dielectric strength: 3000 V, 50 Hz (1 min.)
 Electrical life: 10 000 cycles

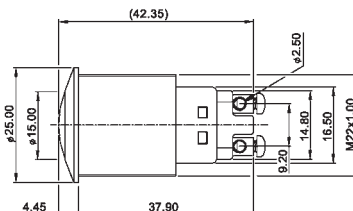


MAV 01 B2M1R

Rating: 36 V DC, 2 A
 Contact resistance: <50 mΩ
 Dielectric strength: 2000 V, 50 Hz (1 min.)
 Electrical life: 200 000 cycles
 Protection: IP 65



MAV 01 B32M3F

Rating: 36 V DC, 2 A
 Contact resistance: <50 mΩ
 Dielectric strength: 2000 V, 50 Hz (1 min.)
 Electrical life: 200 000 cycles
 Protection: IP 65



Ordering code:

