

Microminiature Rotary Coded Switches

Specifications:


Contact rating:	50 V DC, 100 mA, non-switching 15 V DC, 30 mA, switching
Contact resistance:	< 200 mΩ
Insulation resistance:	> 1000 MΩ at 250 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 25° to + 85° C
Mechanical life:	minimum 20 000 operations
Contacts:	gold-plated
Terminals:	PC terminals, phosphor bronze, gold-plated
Material:	case: PPS, black frame: stainless steel rotor: PA, standard types yellow; inverse types red
Construction:	case totally sealed, suitable for washing by immersion
Mounting:	on pc-board
Soldering conditions:	auto-soldering – max.: 6 sec, 260° C

washable


Models:

Code


DRS 7010	BCD
DRS 7110	BCD Inverse
DRS 7016	Hexadecimal
DRS 7116	Hexadecimal Inverse

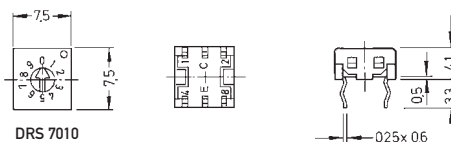

DRS 8010	BCD
DRS 8110	BCD Inverse
DRS 8016	Hexadecimal
DRS 8116	Hexadecimal Inverse

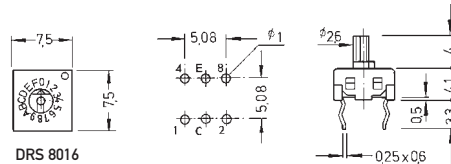

DRR 7010	BCD
DRR 7110	BCD Inverse
DRR 7016	Hexadecimal
DRR 7116	Hexadecimal Inverse

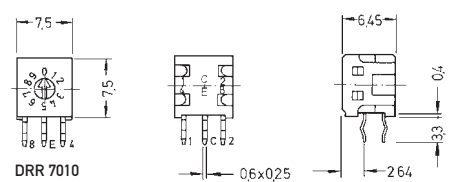

DRR 8010	BCD
DRR 8110	BCD Inverse
DRR 8016	Hexadecimal
DRR 8116	Hexadecimal Inverse

