

# Subminiature Rotary Coded Switches for SMT


## Specifications:

Contact rating:	24 V DC, 100 mA switching
Contact resistance:	< 100 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 25° to + 70° C
Mechanical life:	minimum 2000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PBT black, meets UL 94 V-0, washable, rotor: white; inverse type red
Mounting:	on pc-board


washable

## Models: Code

SMR 20010	BCD
SMR 20110	BCD Inverse

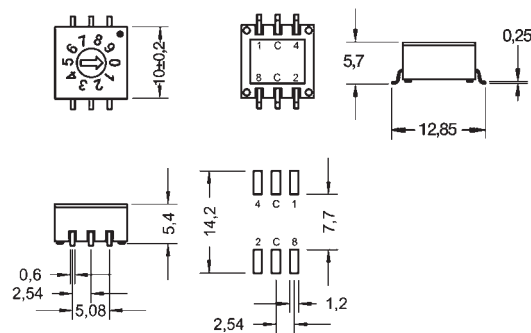

SMR 20016	Hexadecimal
SMR 20116	Hexadecimal Inverse

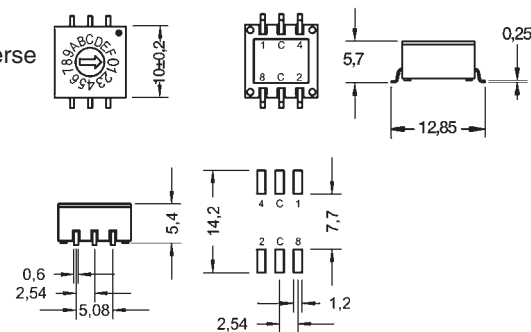

Packing: 700 pieces per reel