



Dual-in-line Switches



Specifications:

Contact rating:	24 V DC, 25 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V DC for 1 minute
Operating temperature:	- 40° to + 85° C
Mechanical life:	minimum 5000 operations per pole
Material:	cover/base: PPS UL 94 V-0, black; actuator: PA66 UL 94 V-0, white
Contacts/Terminals:	brass, tin-plated
Construction:	case sealed series DBS 9000 K: slide recessed, front sealed with protective tape
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	auto-soldering – max.: 10 sec, 260° C ± 10° C

Models:

Series DBS 9000 K

Type	Poles	Length (A)
DBS 9001 K	1	2,98 mm
DBS 9002 K	2	5,52 mm
DBS 9003 K	3	8,06 mm
DBS 9004 K	4	10,60 mm
DBS 9005 K	5	13,14 mm
DBS 9006 K	6	15,68 mm
DBS 9007 K	7	18,22 mm
DBS 9008 K	8	20,76 mm
DBS 9009 K	9	23,30 mm
DBS 9010 K	10	25,84 mm
DBS 9012 K	12	30,92 mm

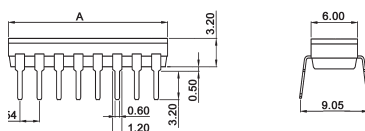

Series DBS 9100 TK

Type	Poles	Length (A)
DBS 9101 K	1	2,98 mm
DBS 9102 K	2	5,52 mm
DBS 9103 K	3	8,06 mm
DBS 9104 K	4	10,60 mm
DBS 9105 K	5	13,14 mm
DBS 9106 K	6	15,68 mm
DBS 9107 K	7	18,22 mm
DBS 9108 K	8	20,76 mm
DBS 9109 K	9	23,30 mm
DBS 9110 K	10	25,84 mm
DBS 9112 K	12	30,92 mm

