



Dual-in-line Switches end-stackable


Specifications:

Contact rating:	24 V DC, 25 mA
Contact resistance:	< 100 mΩ
Insulation resistance:	>100 MΩ
Dielectric strength:	500 V AC (50 Hz or 60 Hz) for 1 minute
Operating temperature:	- 20° to + 85° C
Mechanical life:	minimum 2000 operations per pole
Material:	cover/base: PA-9T UL 94 V-0, black; actuator: LCP UL 94 V-0, white
Contacts:	copper, gold-plated at contact area
Terminals:	brass, gold-plated
Construction:	case sealed series DBS 5000: slide recessed, front sealed with protective tape
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	wave soldering – max.: 5 sec, 260° C

Models:



Series DBS 5000

Type	Poles	Length (A)
DBS 5002	2	4,98 mm
DBS 5004	4	10,06 mm
DBS 5006	6	15,14 mm
DBS 5008	8	20,22 mm
DBS 5010	10	25,30 mm

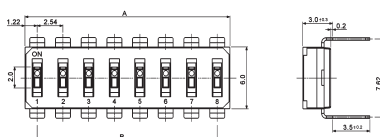

Series DBS 5100

Type	Poles	Length (A)
DBS 5102	2	4,98 mm
DBS 5104	4	10,06 mm
DBS 5106	6	15,14 mm
DBS 5108	8	20,22 mm
DBS 5110	10	25,30 mm

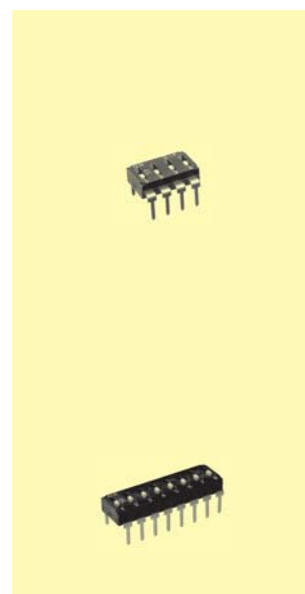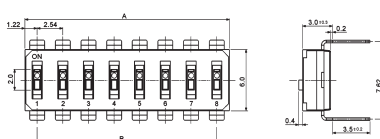

5

Packing: sticks

Type	Stick
DBS 5002 / 5102	95 pieces
DBS 5004 / 5104	47 pieces
DBS 5006 / 5106	31 pieces
DBS 5008 / 5108	23 pieces
DBS 5010 / 5110	18 pieces