Dual-in-line Switches for SMT

Specifications:

Contact rating:	24 V DC, 25 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V DC for 1 minute
Operating temperature:	– 40° to + 85° C
Mechanical life:	minimum 5000 operations per pole
Material:	cover/base: PPS UL 94 V–0, black; actuator: PA66 UL 94 V–0, white
Contacts/Terminals:	brass, tin-plated
Construction:	case sealed, slide recessed, front sealed with protective tape
Mounting:	on pc-board – SMD
Slide position:	OFF

Models:

Series SBS 9000 JTK

Type	Poles	Length (A)
SBS 9002 JTK	2	5,52 mm
SBS 9003 JTK	3	8,06 mm
SBS 9004 JTK	4	10,60 mm
SBS 9005 JTK	5	13,14 mm
SBS 9006 JTK	6	15,68 mm
SBS 9007 JTK	7	18,22 mm
SBS 9008 JTK	8	20,76 mm
SBS 9009 JTK	9	23,30 mm
SBS 9010 JTK	10	25,84 mm
SBS 9012 JTK	12	30,92 mm

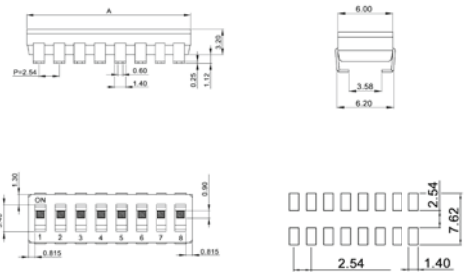



Packing: on tapes

Type	Tape	Reel	Tape width (A)
SBS 9002 JTK	1100 pieces;	Ø 330 mm	16,0 mm
SBS 9003 JTK	1100 pieces;	Ø 330 mm	16,0 mm
SBS 9004 JTK	1100 pieces;	Ø 330 mm	24,0 mm
SBS 9005 JTK	1100 pieces;	Ø 330 mm	24,0 mm
SBS 9006 JTK	1100 pieces;	Ø 330 mm	24,0 mm
SBS 9007 JTK	1100 pieces;	Ø 330 mm	32,0 mm
SBS 9008 JTK	1100 pieces;	Ø 330 mm	32,0 mm
SBS 9009 JTK	1100 pieces;	Ø 330 mm	44,0 mm
SBS 9010 JTK	1100 pieces;	Ø 330 mm	44,0 mm
SBS 9012 JTK	1100 pieces;	Ø 330 mm	44,0 mm