

Microminiature Micro / Snap Action Switches




Specifications:

Contact rating:	30 V AC, 0.5 A
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20°C to +70°C
Mechanical life:	minimum 300 000 operations
Operating force:	< 50 gf
Contacts:	copper alloy, silver plated
Terminals:	brass, silver-plated
Case:	base: PBT cover, stem, lever: POM
Mounting:	on pc-board – hole diameter 1.5 mm, on panel – hole diameter 1.6 mm
Timing:	non-shorting
Soldering conditions:	auto-soldering – max. 3 sec, max. 260°C



Models: Switching function

S P D T

DM-SSM 01 L2 on – mom



DM-SSM 01 D L2 on – mom

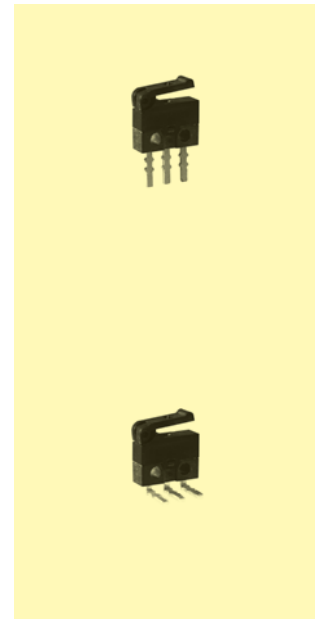

Further types on request