



Miniature Micro / Snap Action Switches



Specifications:

Contact rating:	250 V AC, 15 A
Contact resistance:	< 100 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	1500 V, 50Hz for the duration of 1 minute
Operating temperature:	-25°C to +85°C
Mechanical life:	minimum 100 000 operations
Contacts:	silver-alloy
Terminals:	brass, silver-plated
Case:	PBT (UL 94 V-0)
Mounting:	on panel
Timing:	non-shorting

Models: Switching function

SPDT

DM-VMS15-05N-250 on - mom

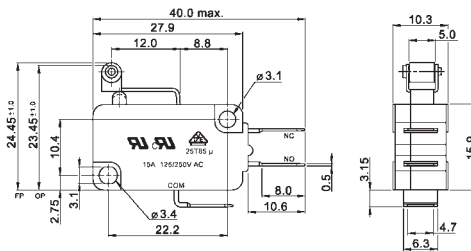

Actuator	Operating force [gf]							Free position [mm]	Operation position [mm]
	60±25	80±30	110±30	160±40	200±50	250±50			
00	60±25	80±30	110±30	160±40	200±50	250±50	18.35±0.5	17.45±0.5	
01	60±25	80±30	110±30	160±40	200±50	250±50	19.05±0.5	18.05±0.5	
02	30±10	40±15	50±20	75±25	100±40	120±40	19.95±0.5	18.25±0.5	
03	12± 5	25±10	30±10	40±15	50±25	60±25	21.95±0.5	18.05±0.5	
04	35±15	45±20	55±20	85±30	110±30	140±40	23.55±0.5	21.75±0.5	
05	60±25	80±30	110±30	160±40	200±50	250±50	24.45±0.5	23.45±0.5	

Ordering code:

DM-VMS15 - □□□ - □□□

