

Miniature Micro / Snap Action Switches





Specifications:

Contact rating:	250 V AC, 10 A
Contact resistance:	< 15 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-25°C to +65°C
Mechanical life:	minimum 20 000 000 operations
Contacts:	silver-alloy
Terminals:	brass, silver-plated
Case:	PBT (UL 94 V-0)
Mounting:	on panel, hole Ø 3.1 mm
Timing:	non-shorting, positive break (force-driven)

Models: Switching function


SPDT

TMV 104 C on - mom

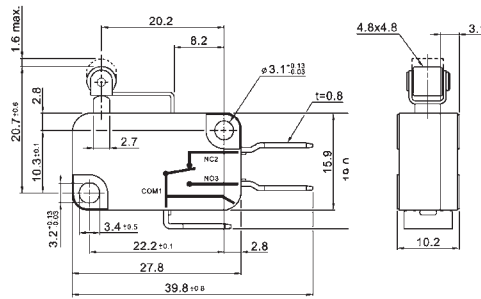


Actuator:


Actuator 0




Actuator 2




Actuator 4

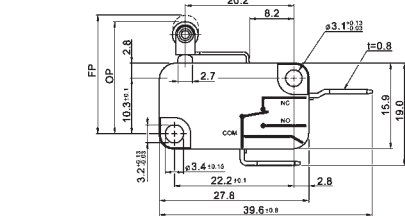


Actuator 1



Actuator 3



Actuator 5

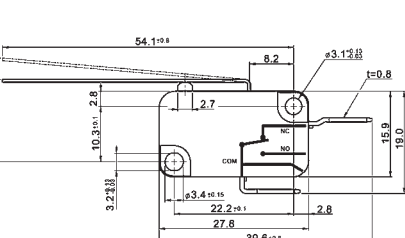

Ordering code:

TMV 10 - C

- Terminals
- change-over switch (3 terminals)
- normally closed (2 terminals)
- Actuator

Actuator	Operating force [gf]	Free position [mm]	Operation position [mm]
0	200	16.1±0.5	14.7±0.5
1	125	19.2±1.2	15.2±1.2
2	200	16.8±0.5	15.2±0.5
3	125	24.7±1.2	20.7±1.2
4	240	22.3±0.6	20.7±0.6
5	70	24.2±2.5	15.2±2.5