


# Subminiature Rotary Coded Switches

## Specifications:


Contact rating:	24 V DC, 25 mA switching
Contact resistance:	< 80 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20° to +70° C
Storage temperature:	-40° to +85° C
Mechanical life:	minimum 10 000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PA6T meets UL 94 V-0, cover light grey, base black rotor: grey, inverse type beige
Mounting:	on pc-board with spacing 2,54 mm
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C

## Models: Code


DRS 60010	BCD
DRS 60110	BCD Inverse
DRS 60016	Hexadecimal
DRS 60116	Hexadecimal Inverse

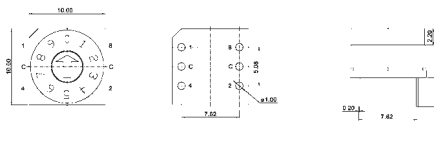


DRS 61010	BCD
DRS 61110	BCD Inverse
DRS 61016	Hexadecimal
DRS 61116	Hexadecimal Inverse

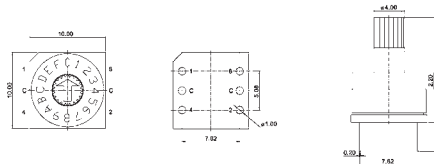


DRR 60010	BCD
DRR 60110	BCD Inverse
DRR 60016	Hexadecimal
DRR 60116	Hexadecimal Inverse

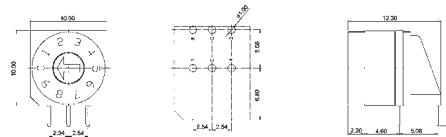

## Special version:



Spacing 2,54 mm  
Additional to type number: -1

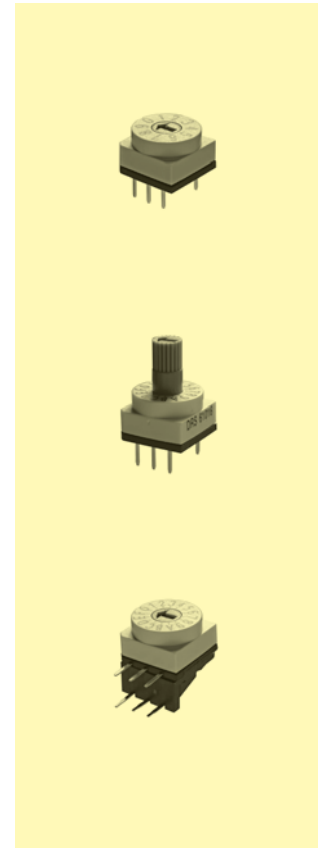




# Subminiature Rotary Coded Switches for SMT

## Specifications:



Contact rating:	24 V DC, 25 mA ss
Contact resistance:	<80 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20° to +70° C
Storage temperature:	-40° to +85° C
Mechanical life:	minimum 10 000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PA6T grey meets UL 94 V-0 rotor: PA 66 grey, inverse type blue
Mounting:	on pc-board
Packing:	600 pcs/reel

## Models Code

SMR 60010	BCD
SMR 60110	BCD Inverse
SMR 60016	Hexadecimal
SMR 60116	Hexadecimal Inverse



SMR 61010	BCD
SMR 61110	BCD Inverse
SMR 61016	Hexadecimal
SMR 61116	Hexadecimal Inverse

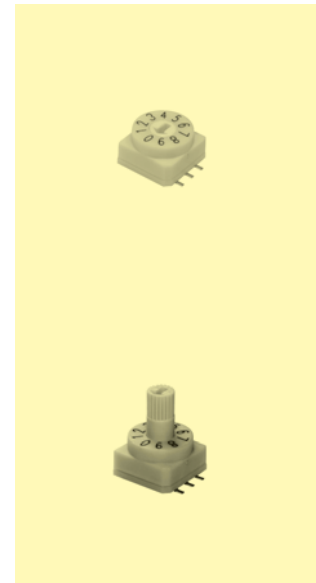

Special versions on request