




CIRCUIT DIAGRAM




Specifications:

- Contact rating: 0.35A, 30V DC
- Contact resistance: 20mOhm max.
- Insulation resistance: 100MOhm min. at 500V DC for 1 minute
- Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
- Operating temperature: -40°C to +85°C
- Mechanical life: 10 000 cycles
- Operating force: 300 +/-150gf
- Contact timing: non-shorting
- Material: Terminal / contact plate: brass strip, silver plated
Base: phenolic resin, natural
Frame: steel, nickel plated
Spring: SWC, temper
Slider: PA66, UL94-HB, black

HOLE LAYOUT ± 0.05



Soldering conditions:

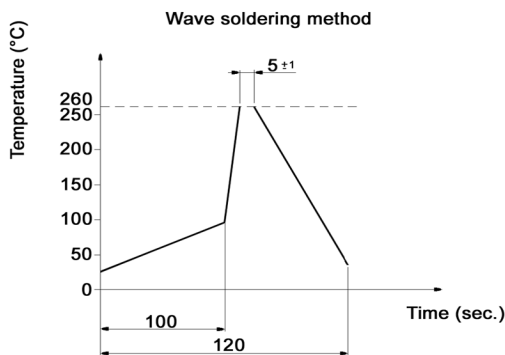

Compliance: RohS III (2015/863/EU)

Tolerances: up to 10: ±0.2mm above: 10-50: ±0.3mm	Date	Name
	11/08	dr
UL94	10/19	dr
Revised	12/14	dr
Modifications	Date	Name

MFP 120

20 13 55

Page

1/1

knitter-switch