

Dual-in-line Switches


Specifications:

Contact rating:	24 V DC, 25 mA / 6 V DC, 100 mA
Contact resistance:	< 50 mΩ
Insulation resistance:	> 100 MΩ at 500 V DC
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 40° to + 85° C
Mechanical life:	minimum 2000 operations per pole
Material:	PPS meets UL 94 V-0
Contacts:	gold-plated over nickel
Construction:	case sealed
	series DBS 1000: slide recessed, front sealed with protective tape
Mounting:	on pc-board
Slide position:	OFF
Soldering conditions:	auto-soldering – max.: 5 sec, 260° C

Models:

Series DBS 1000

Type	Poles	Length (A)
DBS 1002	2	6,02 mm
DBS 1003	3	8,56 mm
DBS 1004	4	11,10 mm
DBS 1005	5	13,64 mm
DBS 1006	6	16,18 mm
DBS 1007	7	18,72 mm
DBS 1008	8	21,26 mm
DBS 1009	9	23,80 mm
DBS 1010	10	26,34 mm

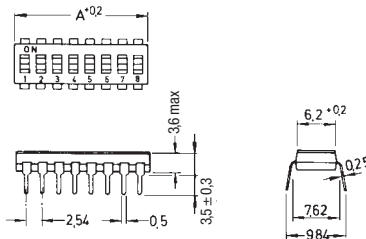

Series DBS 1100

Type	Poles	Length (A)
DBS 1102	2	6,02 mm
DBS 1103	3	8,56 mm
DBS 1104	4	11,10 mm
DBS 1105	5	13,64 mm
DBS 1106	6	16,18 mm
DBS 1107	7	18,72 mm
DBS 1108	8	21,26 mm
DBS 1109	9	23,80 mm
DBS 1110	10	26,34 mm

